

Anziehvorschrift Zylinderkopf

Tightening Instructions for Cylinder Head

Instructions de serrage pour culasse

Prescripciones de apriete para culatas

729.050

passend für / suitable for
adaptable à / adaptable a

PSA/BMW




Das Original

Schraubenkopf / Head shape Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete
Tête de vis / Cabeza de tornillo



426.830
M 8x1,25x35

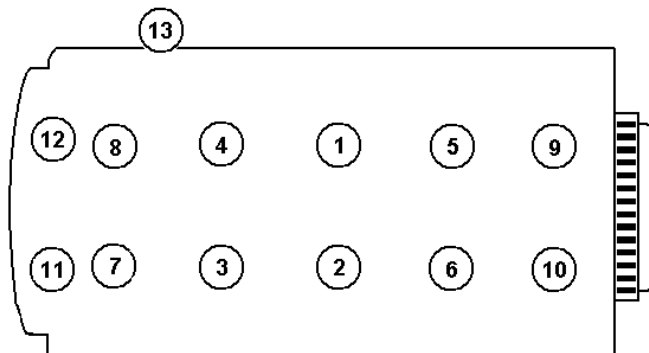

Anziehen/
Tightening/
Serrage/
Apriete

● Mot EP3 / Pos 1-10
30 Nm
➤ 90°
➤ 90°
Pos. 11-12:
25 Nm
➤ 90°
➤ 90°
Pos. 13:
30 Nm

● Mot EP6 / Pos 1-10
30 Nm
➤ 90°
➤ 90°
Pos. 11-12:
30 Nm
➤ 90°
➤ 90°
Pos. 13:
9 Nm

Zeichenerklärung / Explanations / Explication / Explicacion

	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

Motortyp / Engine type / Type de moteur / Tipo de motor

Ø: 78 mm; ÷: 0,90 mm

PSA Mot. EP3,

EP6 / Mini Mot. N12 B14/B16

1,4-1,6 ltr., 55-90 kW (75-122 PS)

PSA 207, 207 CC, 308, 3008, 5008, C4

Mini R55/R56/R57/R58/R60 Cooper, One 1.4i

Elring-Serviceteam

Fon +49 7123 724 799

Fax +49 7123 724 798

service@elring.de

26/06/25

729.050