





CHARACTERISTICS	
RATED VOLTAGE	24V
OPERATING VOLTAGE	(18 + 30)V
OPERATING TEMPERATURE	(-25 + 80)°C
INTERVAL PAUSE	(5±1) SEC.
PROTECTION INDEX	IP54

MATERIALS					
N.	Description	Material	Treatment	Color	Note
1	HOUSING	PA 66 GF30	-	BLACK	-
2	BASEPLATE	PA 66 GF15	-	BLACK	-
3	6 x TERMINAL	CuZn37	Sn 5µm	GREY	DIM. ACC. TO ISO 8092

TERMINALS ARRANGEMENT




WIRING DIAGRAM

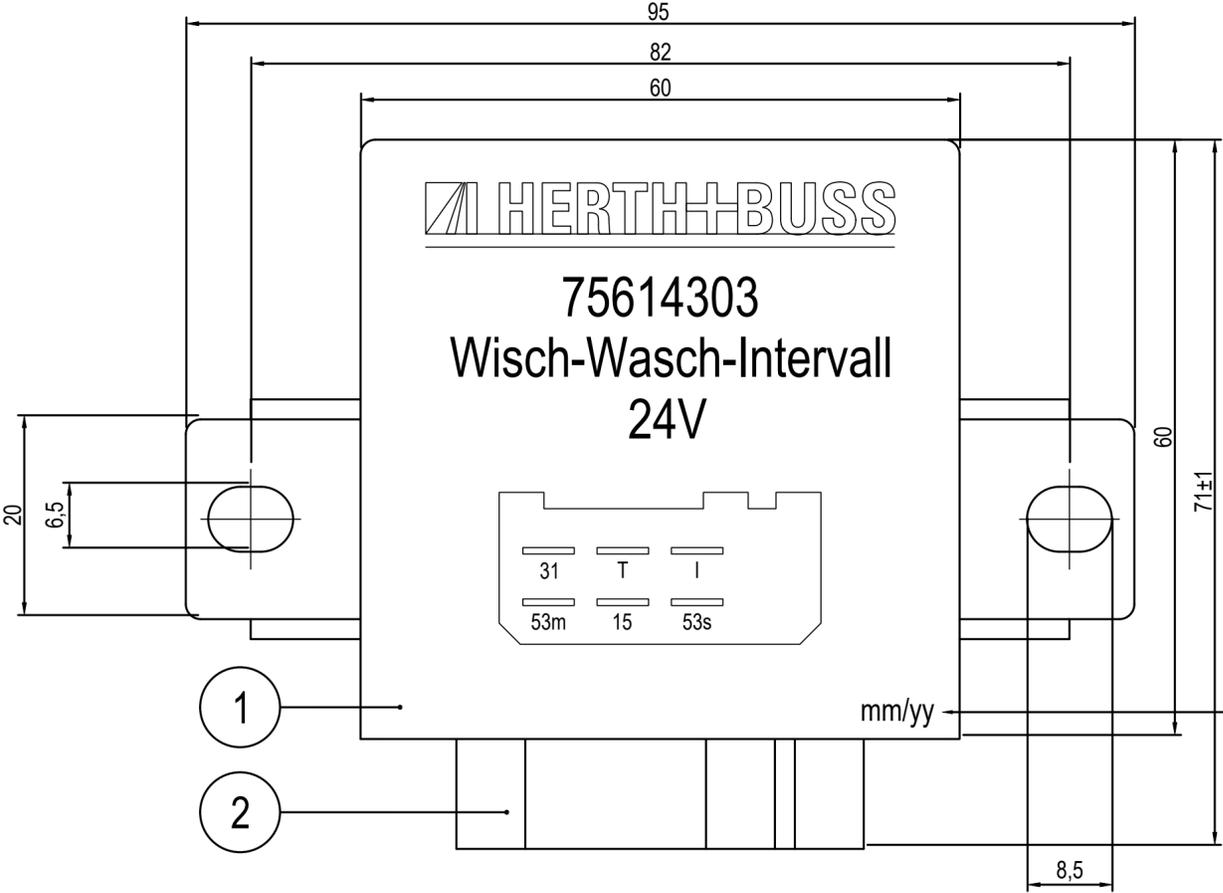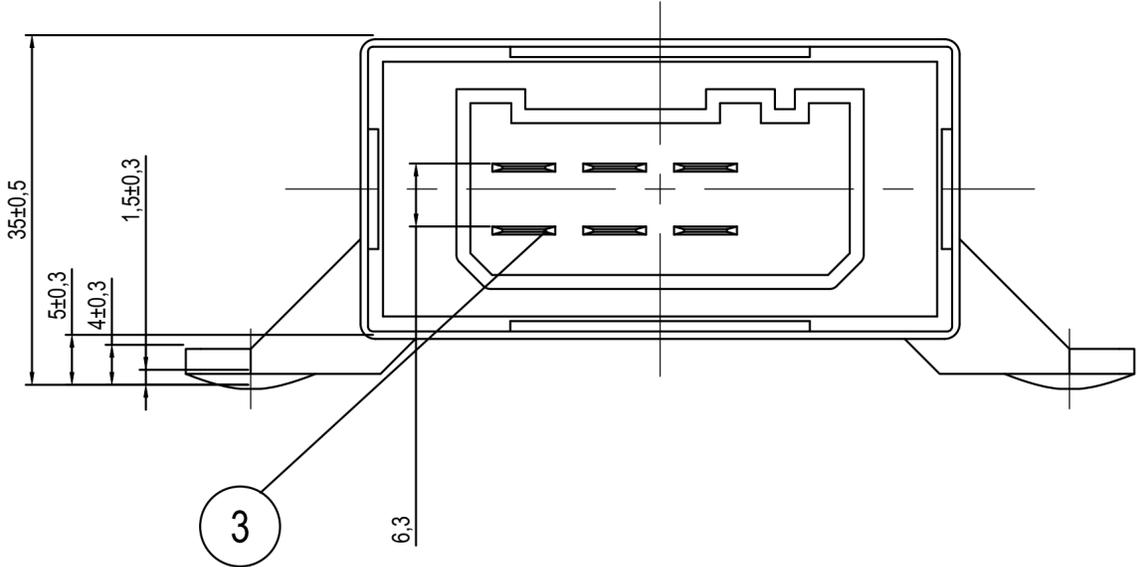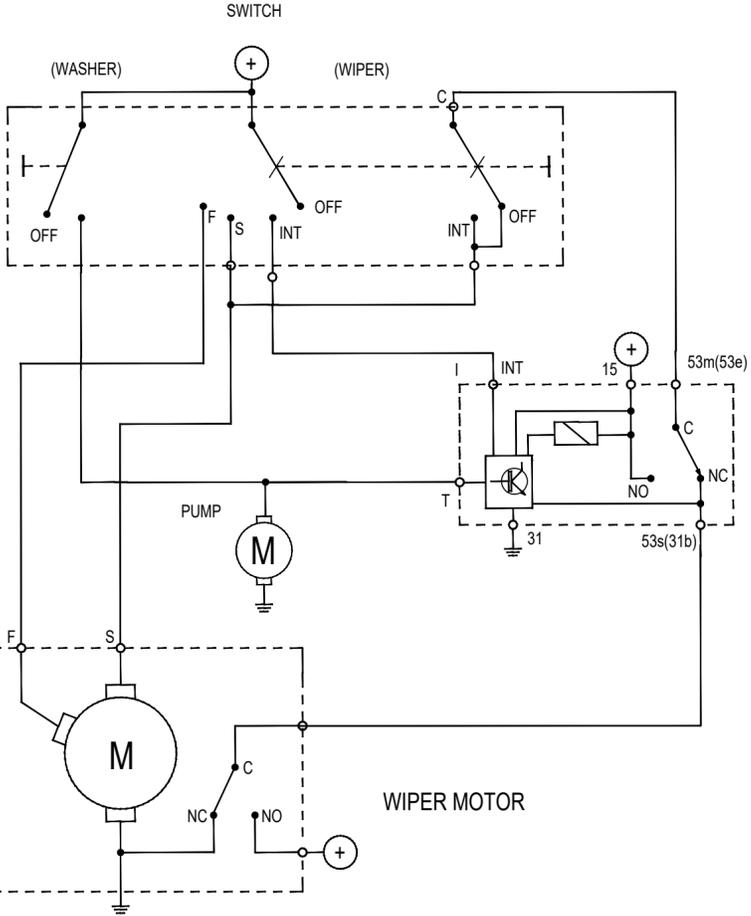

PRODUCTION DATE

mm/yy

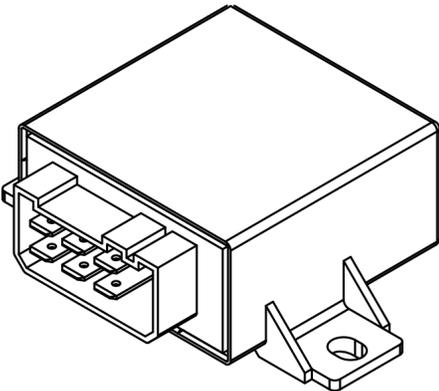

REVISIONS			
REV.	DESCRIPTION	COORDINATES	DATE

GENERAL TOLERANCES ACCORDING TO ISO 2768-mH			
ALL PROPRIETARY RIGHTS RESERVED. THE COMPANY ASSERTS ONE'S RIGHTS ACCORDING TO THE LAW. THIS DRAWING SHALL NOT BE REPRODUCED OR IN ANY WAY UTILIZED TO MAKE COMPONENTS AND IT MUST NOT BE RELEASED TO OTHER PARTIES WITHOUT WRITTEN CONSENT.			
	TITLE	WEIGHT	SCALE
	WIPER RELAY UNIT 24V 6PIN - INT. TIME 5 SEC.	70g	2:1
	PART NUMBER	REV.	SIZE
75614303	0	A2	SHEET
			1/1